

Exhaust air valve OPK-series

OPK-series, exhaust air valve, 100 mm - 200 mm



Exhaust air valve OPK-series

OPK-series, exhaust air valve, 100 mm - 200 mm



OPK is a round valve with aerodynamically design with good characteristics in terms of noise level, air flow capacity and pressure drop. The valve is mounted in a ceiling or a wall and is intended for ventilation systems with a relatively low pressure drop. The design of the valve and a gasket of moltoprene prevents soiling.

Attachment, adjustment and detachment

The valve is pushed into the frame. The cone is screwed out or in the number of turns giving the gap an opening in mm corresponding to pressure drop and the desired air flow according to the diagram. The pressure drop can be checked by using a suitable measuring device. When dismantling, the valve is pushed sideways and then pulled out.

Material


The valve is made of polypropylene plastic that can withstand temperatures up to 120 degrees Celsius. The material keeps its color over time and is recyclable.

Cleaning

The valve is cleaned with normal detergent.

Color

Standard white (RAL 9003). Other colors can be delivered by arrangement.

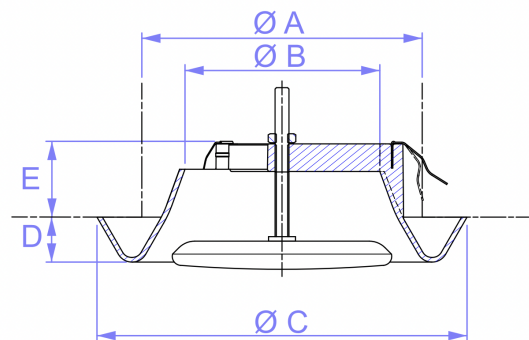


OPK	Ø A	Ø B	Ø C	D	E	Weight
100	100	80	152	20	31	107 gr
125	125	98	165	23	30	130 gr
150	150	115	190	19	35	152 gr
160	160	115	190	19	35	152 gr
200	200	163	240	20	35	310 gr




Specifications

Capacity charts


OPK 100

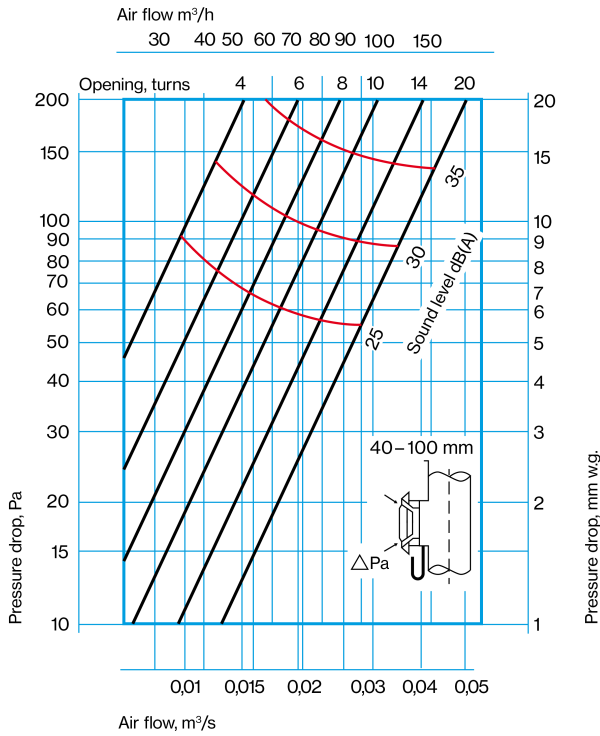

OPK 150

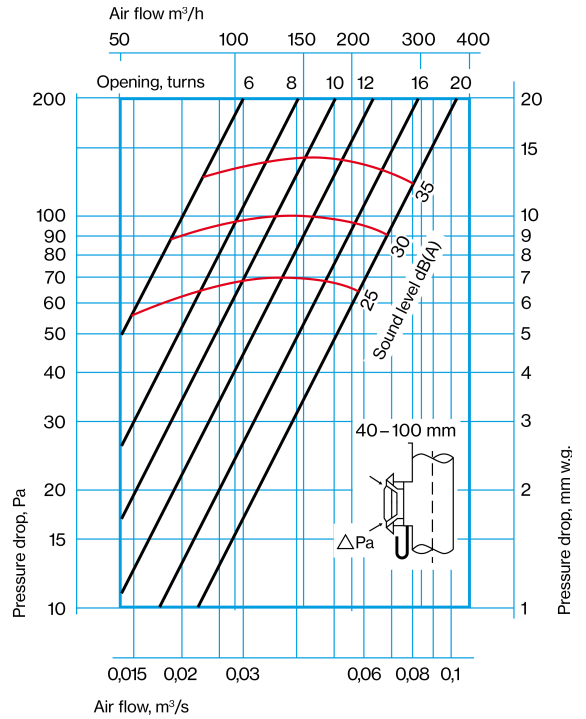

OPK 160

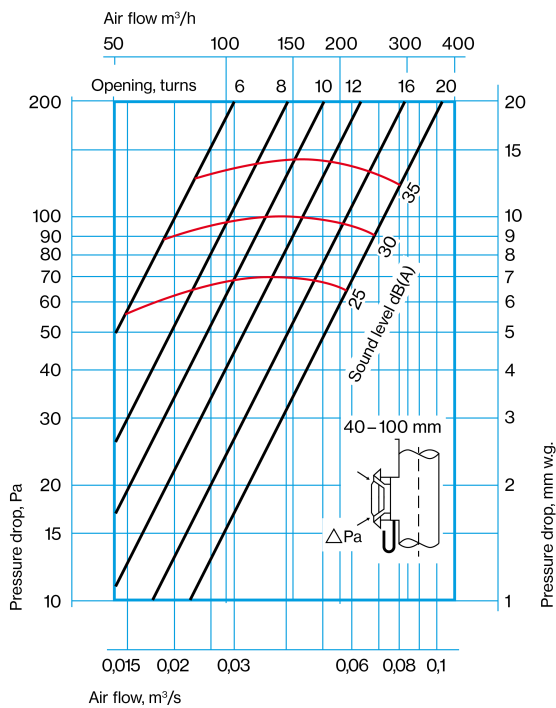

OPK 200

